

TP16

An economical option that offers great value for money. Suitable for various types of houses, utility, and industrial buildings. Equipped with a water lock for extra protection against water infiltration at the side overlap. Designed for roofs with slopes as low as 14 degrees.

Material: Hot-dip galvanized painted steel sheet (or painted aluminum*)

Thickness: 0.50 - 0.60 mm (0.50 mm*)

Weight: 4.35 - 5.23 kg/m² (1.51 kg/m²*)

Effective Width: 1,100 mm

Length: 800 - 6,500 mm (S)

Profile Height: 16 mm


Water Lock: Yes


[Contact us](#)



•



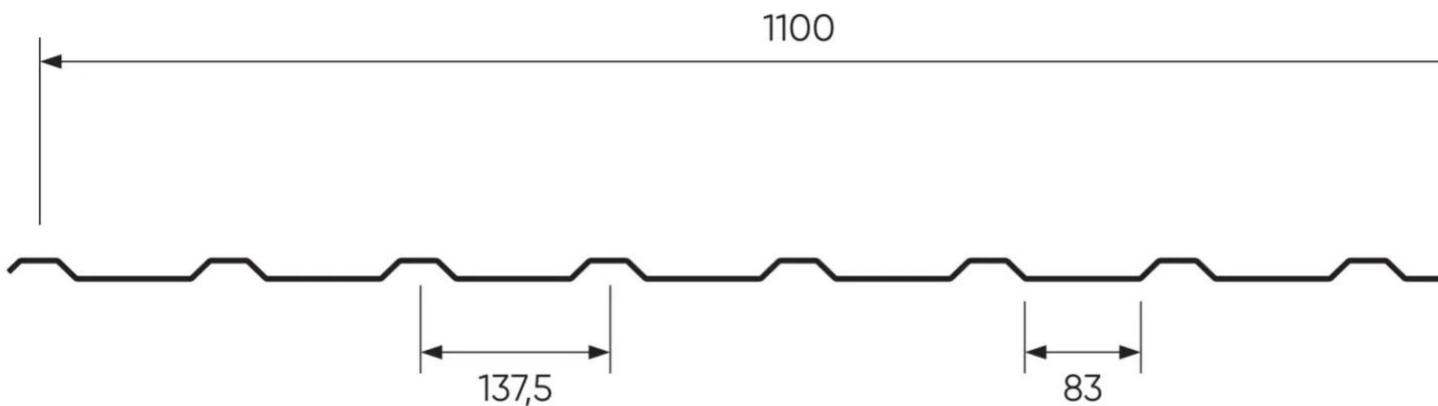

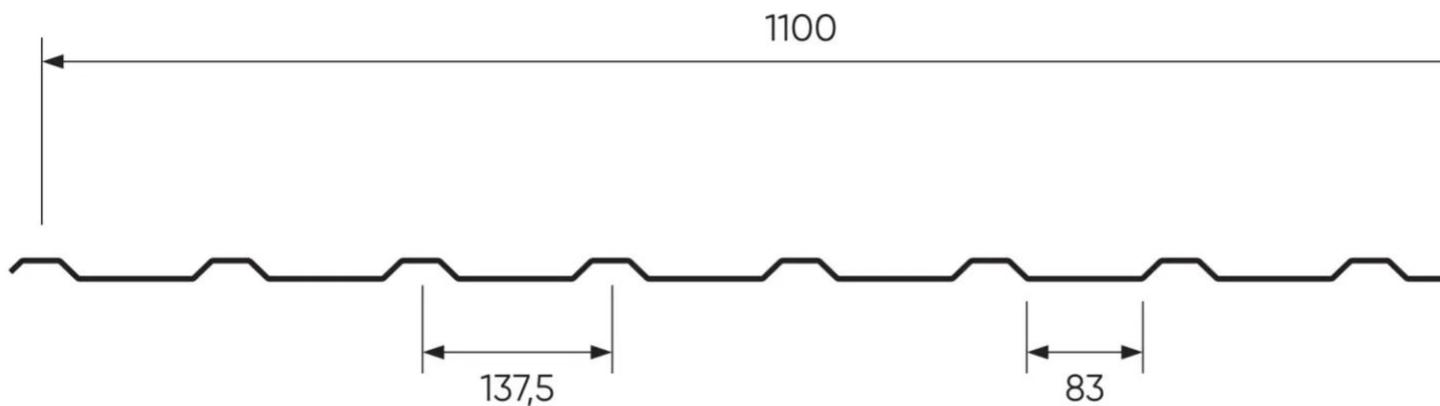

Properties

Accessories

[Request informations](#)

Related products

[Request informations](#)


Technical documents

Documents



EPD coated low profiles

[View document](#)

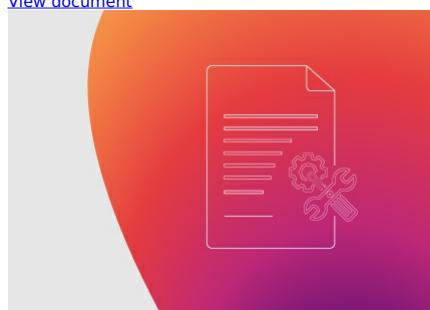

Monteringsanvisning TP

[View document](#)

Technical & commercial documentation



Produktkatalog Sverige

[View document](#)