TP16


An economical option that offers great value for money. Suitable for various types of houses, utility, and industrial buildings. Equipped with a water lock for extra protection against water infiltration at the side overlap. Designed for roofs with slopes as low as 14 degrees.

Material: Hot-dip galvanized painted steel sheet (or painted aluminum*)
Thickness: 0.50 – 0.60 mm (0.50 mm*)
Weight: 4.35 – 5.23 kg/m² (1.51 kg/m²*)
Effective Width: 1,100 mm
Length: 800 – 6,500 mm (S)
Profile Height: 16 mm
Water Lock: Yes

Contact us →







Properties


Request informations →

Accessories

Request informations →


Related products

Related products

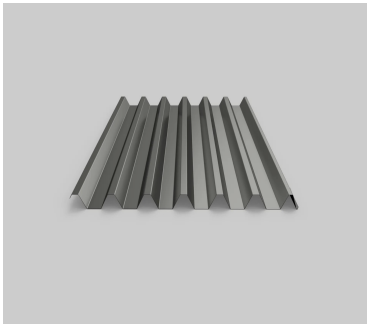


TP45

Trapezoidal profiles

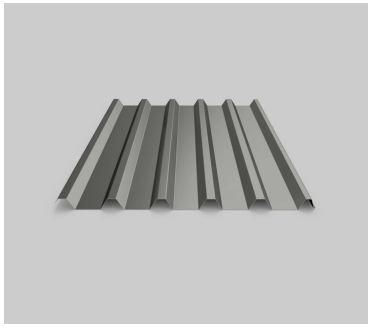


TP32

Trapezoidal profiles

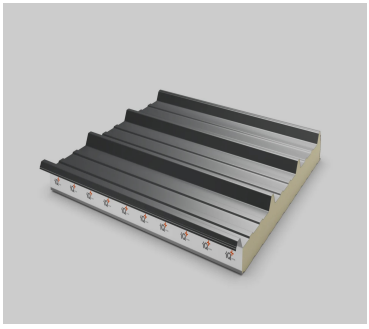

Ondatherm® T iQ+

Trapezoidal profiles

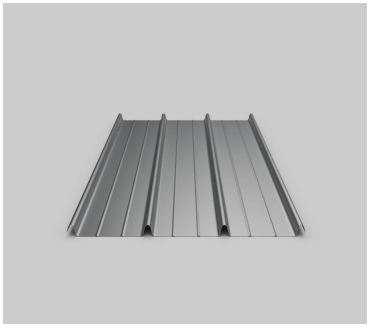

Authentique 3.283.29T

Trapezoidal profiles

Technical documents

Request informations →

Technical & commercial documentation

Request informations →