
TP32

Equipped with a water lock, this profile offers extra protection against water infiltration at the side overlap. Suitable for most roofs with slopes down to 14 degrees.

- **Material**: Hot-dip galvanized painted steel sheet
- **Thickness**: 0.50 – 0.60 – 0.65 – 0.75 mm
- **Weight**: 4.70 – 5.64 – 6.11 – 7.05 kg/m²
- **Effective Width**: 1,020 mm
- **Length**: 750 – 10,000 mm
- **Profile Height**: 32 mm
- **Water Lock**: Yes



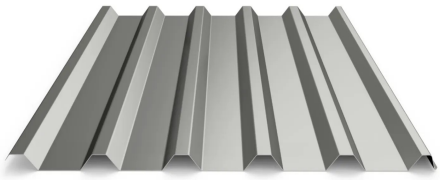

Contact us →

Properties


Request informations →

Accessories

Request informations →


Related products

Related products

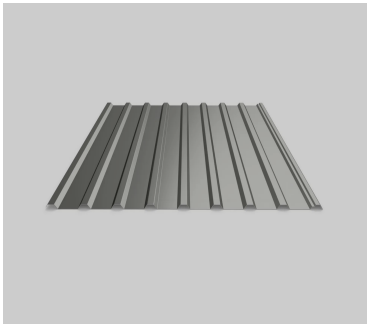


TP16

Trapezoidal profiles

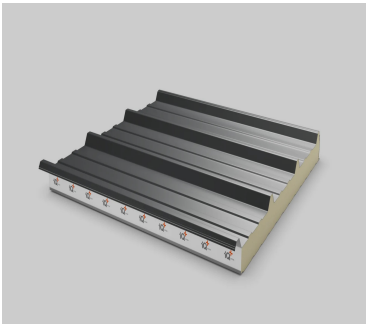


Ondatherm® T iQ+

Trapezoidal profiles

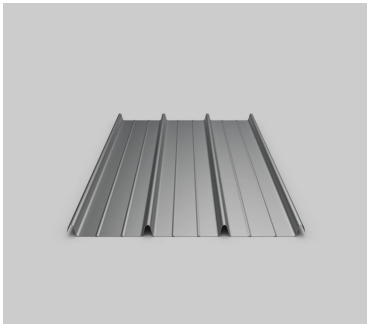

Authentique 3.283.29T

Trapezoidal profiles

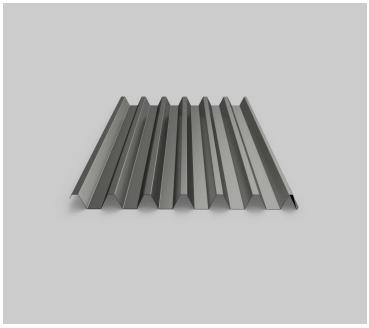

TP45

Trapezoidal profiles

Technical documents

Request informations →

Technical & commercial documentation

Request informations →